

Super Erecta® Shelf Wire Shelving

- **Unique Design:** The open wire design of these shelves minimizes dust accumulation and allows free circulation of air, greater visibility of stored items and greater light penetration.
- **Durable Construction:** Super Erecta® shelves and posts are constructed of heavy-gauge carbon steel or Type 304 stainless steel.
- **Choice of Finishes:** Super Erecta Brite™ and chrome-plated for dry storage; Metroseal™ Epoxy (green or gray), and Type 304 stainless steel for corrosive environments; and attractive epoxy color options for merchandising applications.
- **Metroseal:** Proprietary rust-resistant finish is a durable epoxy coating over a protective zinc substrate. Metroseal contains Microban® antimicrobial product protection that helps fight the growth of stain and odor-causing bacteria to keep product cleaner between cleanings. 15-year limited warranty against rust and corrosion. NSF listed for wet environments.
- **Versatile:** Super Erecta® Shelf wire shelving can adapt to your changing needs. By using various accessories, hundreds of shelving configurations become possible.
- **Fast, Secure Assembly:** SiteSelect® Posts have a double groove visual guide feature every 8" (203mm), circular grooves at 1" (25mm) increments, and are numbered at 2" (50mm) intervals. A patented, tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Shelf Ribs:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows maximum use of storage cube.
- **Adjustable Feet:** Bolt levelers compensate for surface irregularities.

Note: Stainless stationary posts are equipped with stainless steel leveling feet.



Super Erecta Chrome Wire

PROTECTION THAT LIVES ON
MICROBAN



Metroseal Gray Epoxy
Finish with Microban



Metroseal Green Epoxy
Finish with Microban




Super Erecta with Metroseal
NSF listed for wet environments



MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban® Products Company, Huntersville, NC. Microban® product protection does not by itself protect a user from food borne illness. Product must be routinely cleaned.



All Metro Catalog Sheets are available on our website: metro.com

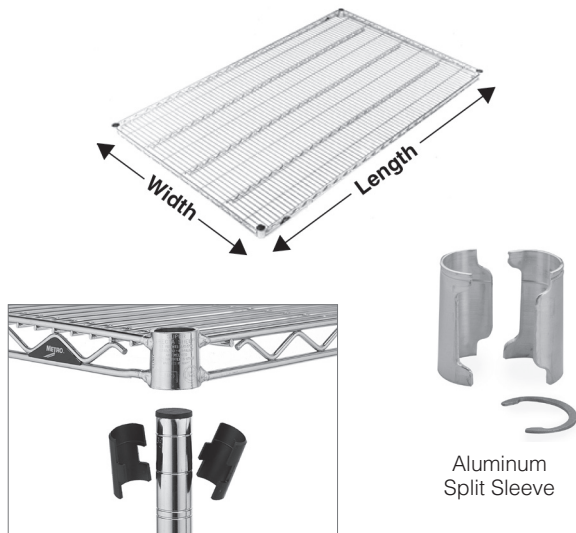

Wire Shelves

- See spec sheet 10.14 for epoxy color options.
- Plastic split sleeves are included with each shelf
Replacements are available: Cat. No. **9985** (bag of 4)
- Aluminum split sleeves are recommended for abusive mobile applications. Sleeves with stainless C-rings must be used for cart wash applications (exceeding 200°F/93°C) and for all autoclave applications.
Cat. No. **9986Z** (bag of 4 with zinc C-rings)
Cat. No. **9986S** (bag of 4 with stainless steel C-rings)
- Weight capacity (evenly distributed) per shelf
800 lbs. (363kg) for lengths of 18" to 48" (457 to 1219mm)
600 lbs. (272kg) for lengths of 54" (1370mm) or longer
- Weight capacity (evenly distributed) per unit.
Stationary shelving units have a maximum load capacity (evenly distributed) of 2,000 lbs. (907kg). Mobile units have a maximum capacity of three times the caster load rating up to but not exceeding 1,000 lbs. (453kg) total. Consult the Metro catalog for caster load ratings.

Cat. No. Super Erecta Brite	Cat. No. Chrome	Cat. No. Metroseal Green with Microban	Cat. No. Metroseal Gray with Microban	Cat. No. Stainless	Nominal Width/Length		Approx. Pkd Wt.	
					(in.)	(mm)	(lbs.)	(kg)
1424BR	1424NC	1424NK3	1424NK4	1424NS	14x24	355x610	5.3	2.4
1430BR	1430NC	1430NK3	1430NK4	1430NS	14x30	355x760	6.3	2.8
1436BR	1436NC	1436NK3	1436NK4	1436NS	14x36	355x914	7.5	3.4
1442BR	1442NC	1442NK3	1442NK4	1442NS	14x42	355x1066	8.3	3.8
1448BR	1448NC	1448NK3	1448NK4	1448NS	14x48	355x1219	9.4	4.3
1460BR	1460NC	1460NK3	1460NK4	1460NS	14x60	355x1524	11.8	5.4
1472BR	1472NC	1472NK3	1472NK4	1472NS	14x72	355x1829	14.4	6.5
-	1818NC	1818NK3	1818NK4	-	18x18	457x457	5.3	2.4
1824BR	1824NC	1824NK3	1824NK4	1824NS	18x24	457x610	6.1	2.7
1830BR	1830NC	1830NK3	1830NK4	1830NS	18x30	457x760	7.1	3.2
1836BR	1836NC	1836NK3	1836NK4	1836NS	18x36	457x914	8.2	3.7
1842BR	1842NC	1842NK3	1842NK4	1842NS	18x42	457x1066	9.3	4.2
1848BR	1848NC	1848NK3	1848NK4	1848NS	18x48	457x1219	10.7	4.9
1854BR	1854NC	1854NK3	1854NK4	1854NS	18x54	457x1370	11.9	5.4
1860BR	1860NC	1860NK3	1860NK4	1860NS	18x60	457x1524	13.4	6.1
1872BR	1872NC	1872NK3	1872NK4	1872NS	18x72	457x1829	14.6	6.6
2124BR	2124NC	2124NK3	2124NK4	2124NS	21x24	530x610	10.1	4.6
2130BR	2130NC	2130NK3	2130NK4	2130NS	21x30	530x760	10.5	4.8
2136BR	2136NC	2136NK3	2136NK4	2136NS	21x36	530x914	10.7	4.9
2142BR	2142NC	2142NK3	2142NK4	2142NS	21x42	530x1066	11.5	5.2
2148BR	2148NC	2148NK3	2148NK4	2148NS	21x48	530x1219	11.9	5.4
2154BR	2154NC	2154NK3	2154NK4	2154NS	21x54	530x1370	12.9	5.8
2160BR	2160NC	2160NK3	2160NK4	2160NS	21x60	530x1524	13.4	6.1
2172BR	2172NC	2172NK3	2172NK4	2172NS	21x72	530x1829	14.4	6.5
2424BR	2424NC	2424NK3	2424NK4	2424NS	24x24	610x610	6.5	3.0
2430BR	2430NC	2430NK3	2430NK4	2430NS	24x30	610x760	8.3	3.8
2436BR	2436NC	2436NK3	2436NK4	2436NS	24x36	610x914	10.1	4.6
2442BR	2442NC	2442NK3	2442NK4	2442NS	24x42	610x1066	11.9	5.4
2448BR	2448NC	2448NK3	2448NK4	2448NS	24x48	610x1219	14.2	6.4
2454BR	2454NC	2454NK3	2454NK4	2454NS	24x54	610x1370	16.1	7.3
2460BR	2460NC	2460NK3	2460NK4	2460NS	24x60	610x1524	18.0	8.2
2472BR	2472NC	2472NK3	2472NK4	2472NS	24x72	610x1829	21.4	9.7

Note: The actual length of the shelves is 1/8" (3.2mm) shorter than the nominal dimension shown.
The actual depth of the shelves is 1/8" (3.2mm) greater than the nominal dimension shown.

Note: The following restrictions apply to shelving units that utilize 14" (355mm) wide shelves:
Free-standing units: Units taller than 63" (1600mm) must be properly fastened to the floor or wall using Metro foot plates or wall brackets.
Mobile units: maximum allowable post height is 54" (1370mm).